

Wall Mounted Multi-Format HDBaseT Transmitter, 3 Inputs to 1 HDBaseT Output

MFT-31C





MFT-31C

These are ideal for classroom and meeting room environments where a quick and simple connection from a laptop, mobile or any other devices is required.

FEATURES

- 2x HDMI inputs
- 1x USB-C input
- 1x HDBaseT output (70m @ 1080p, 40m @ 4K30)
- RS232 control (Tx Rx) and data pass through
- IR Eye data pass through
- Built in IR Eye (IR receiver)
- MFT-31C IR learning for Display On/Off control
- Display On/Off control via RS232 and CEC
- LED indication for selected input
- LED indication for Link status to HDBaseT receiver
- Auto/Manual selection

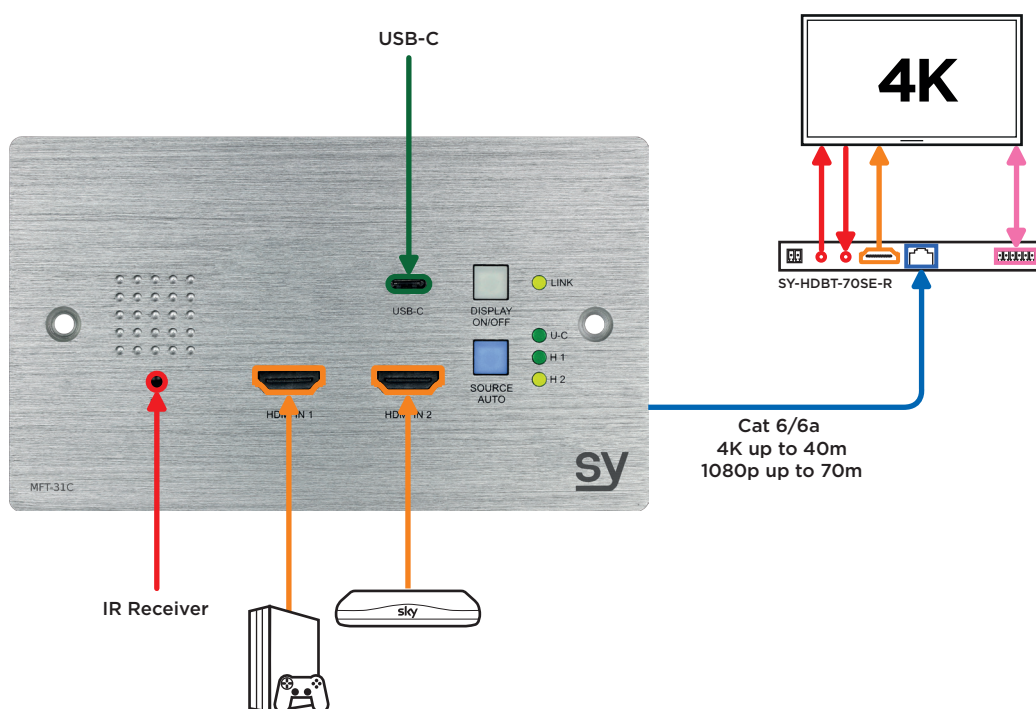

Wall Mounted Multi-Format HDBaseT Transmitter, 3 Inputs to 1 HDBaseT Output

MFT-31C



SPECIFICATIONS

PART NUMBER	SY-MFT-31C	
VIDEO RESOLUTIONS/FORMATS	VESA and SMPTE 480p to 2160p with 3D. All HDMI resolutions to 3840x2160p @60Hz 4:2:0, 480p@60Hz 1080p@24Hz 4K@24Hz, 576p@50Hz 1080p@50Hz 4K@30Hz, 720p@60Hz 1080p@60Hz 4K@60Hz YUV4:2:0. Up to 4K30 4:4:4 - 4K@60Hz YUV4:2:0 All PC resolutions to 1920x1200@60Hz	
BANDWIDTH	10.2Gbps	
HDCP	1.4 & 2.2	
INPUTS	Video 2x HDMI type A 1x USB-C	Audio L+R 3.5mm Stereo Jack. 20Hz - 20kHz, 1.5Vrms max.
MAXIMUM HDBaseT RANGE	40m - 4K60 4:2:0 70m - 1080p60	
CONTROL	RS232 IR	
POWER SUPPLY	24V DC, 1.25A	
POWER CONSUMPTION	5W	
WEIGHT AND DIMENSIONS	Weight (net) 0.235kg	Size (WHD) UK: 146 x 86 x 43mm EU: 151 x 80 x 43mm
WHAT'S IN THE BOX	1x MFT-31C User's Manual	

"HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of the HDMI Licensing LLC in the United States and other countries"
Details subject to change with no prior notice.